

Kestrel Series

K-2048



LM79

LM80

L70:5+ YEARS

Features


- Economical, vibrant, bright
- Low wattage, high output
- Ideal white point
- Ideal for channel letters
- Guaranteed life over 50,000 hours

Specifications


Viewing Angle	120°
Watts	0.48w/mod (1.44w/ft.)
Input Voltage	12vDC
Modules/Foot	3/ft fully stretched
Protection Grade	IP67
Packaging	Anti-static bag, 100 modules (33.3 ft)/bag
Warranty	5 Year (Product) / 5 Year (Labor)
Operating Temp.	-40 ~ +60 °C / -20 ~ +140 °F
Storage Temp.	-40 ~ +70 °C / -20 ~ +158 °F
Cascade	50 mods single-ended power feed (pcs) 100 mods double-ended power feed (pcs)

Color	Part#	Color Temp	Lumens
Pure White	HLED-K2048	7000K	40 lm/mod (120 lm/ft.)

Profile Drawings

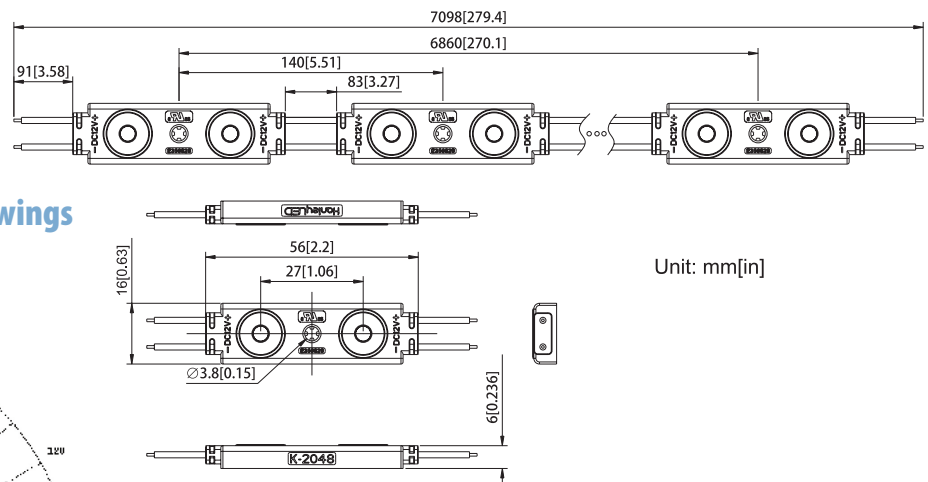

Light Distribution

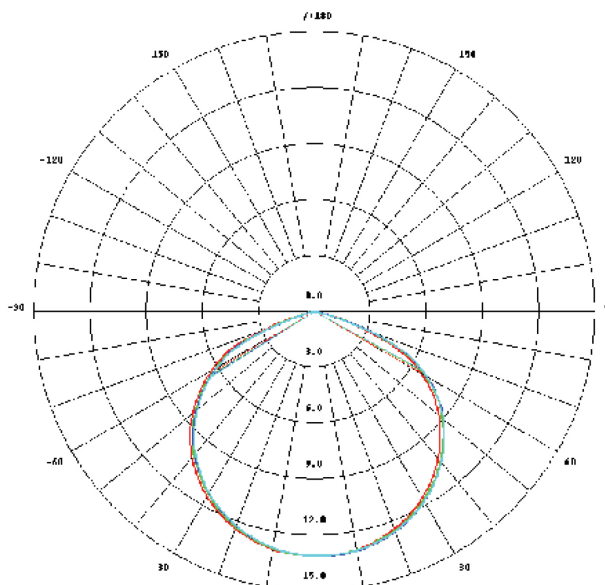

MODEL	MAX POWER SUPPLY LOAD			
	35W	60W	100W	150W
K-2048	72mods	125mods	208mods	312mods

HanleyLED recommends underloading any power supply by 15%